

Precision Coaxial Adapter

MODEL WA1548

DC – 18.0 GHz

Type SMA to Type N



Specifications

Nominal Impedance: 50 ohms

Frequency Range: DC - 18.0 GHz

Temperature Range: -55°C to +125°C

Construction: Stainless Steel bodies, beryllium copper with gold plated female contacts, stainless steel male contacts.





Connectors: Types N and SMA per MIL-STD-348 interface dimensions mate non-destructively with MIL-PRF-39012 connectors. Coupling Torque 14 in-lbs for N-Type and 8 in-lbs for SMA.

Weight: 49g (1.72 oz), max

Maximum VSWR	
Frequency (GHz)	VSWR
DC - 18.0	1.10 per adapter

Insertion Loss		
Frequency (GHz)	Max. Ins Loss	Repeatability
DC - 12.4	0.40	0.01
12.4 - 18.0	0.43	0.02

Physical Dimensions:

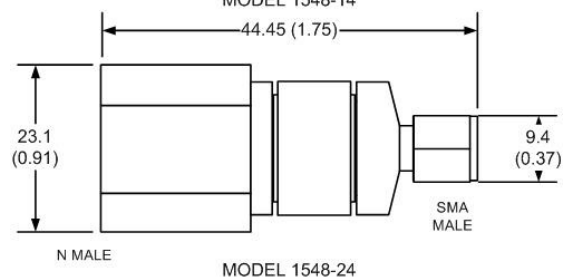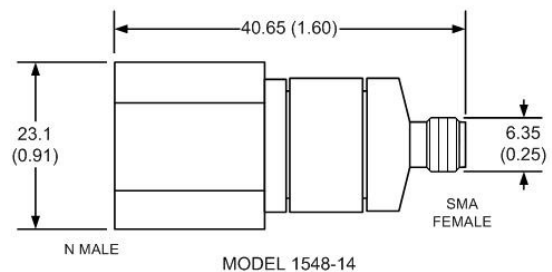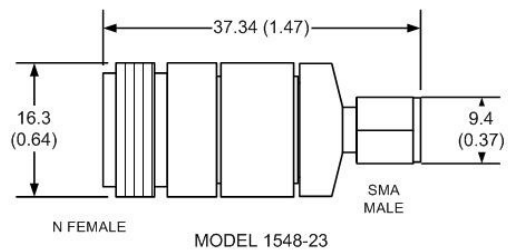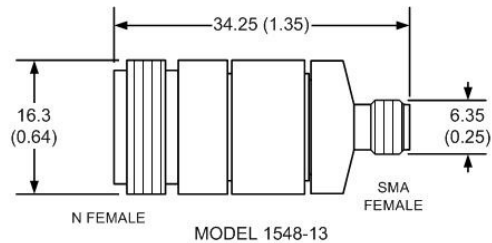

WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com