

Precision Coaxial Adapter




MODEL WA1587

DC – 26.5 GHz

SMA to SMA



Physical Dimensions:

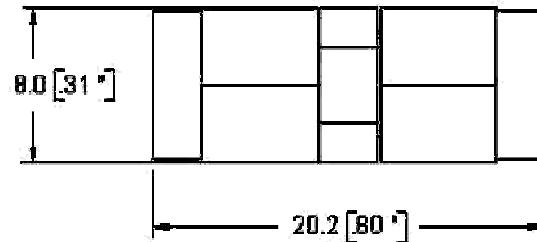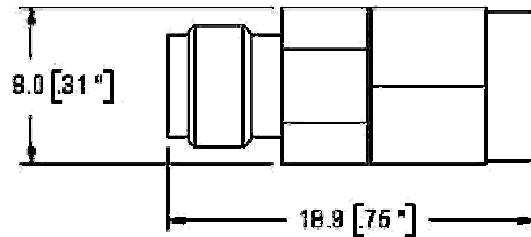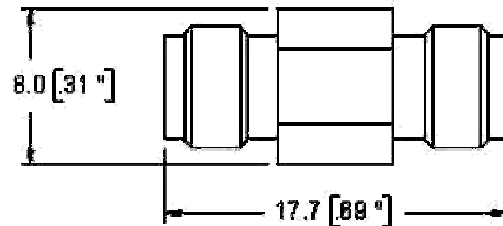

Specifications

Nominal Impedance: 50 ohms

Frequency Range: DC - 26.5 GHz

Temperature Range: -55°C to +125°C

Construction: Stainless Steel body, gold-plated beryllium copper contacts.

Connectors: SMA connectors per MIL-STD-348 interface dimensions mate non-destructively with MIL-PRF-39012 connectors.

Weight:

WA1587-11	3.5g (0.11 oz)
WA1587-12	4.6g (0.16 oz)
WA1587-22	5.4g (0.19 oz)

Maximum VSWR	
Frequency (GHz)	VSWR
DC - 26.5	1.15

Insertion Loss		
Frequency (GHz)	Max. Ins Loss	Repeatability
DC - 12.4	0.30	0.01
12.4 - 18.0	0.40	0.02
18.0 - 26.5	0.50	0.02



WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com

143

Specification
Subject to change
without notice