

Precision Coaxial Adapter





MODEL WA7006

DC – 40.0 GHz

2.92mm to 2.4mm



Physical Dimensions:

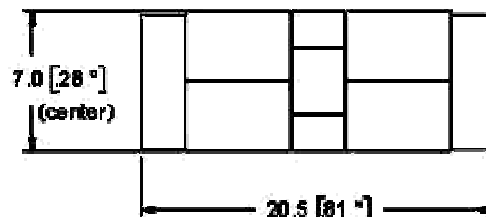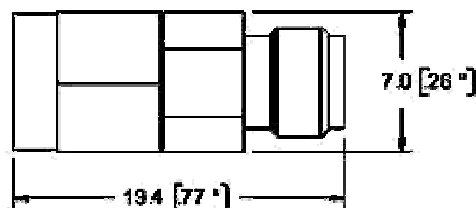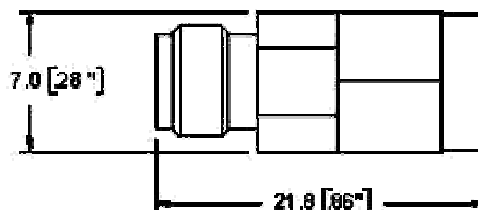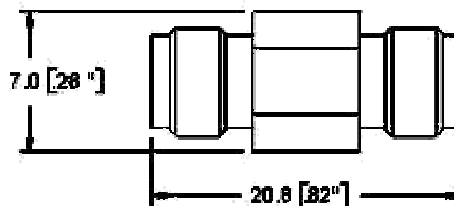

Specifications

Nominal Impedance: 50 ohms

Frequency Range: DC - 40.0 GHz

Temperature Range: -55°C to +125°C

Construction: Stainless Steel body, gold-plated beryllium copper contacts.

Connectors: 2.92mm and 2.4mm connectors per MIL-STD-348 interface dimensions mate non-destructively with MIL-PRF-39012 connectors.

Weight:

WA7006-11	3.5g (0.11 oz)
WA7006-12	4.6g (0.16 oz)
WA7006-21	4.6g (0.16 oz)
WA7006-22	5.4g (0.19 oz)

Maximum VSWR	
Frequency (GHz)	VSWR
DC - 40.0	1.20

Insertion Loss		
Frequency (GHz)	Max. Ins Loss	Repeatability
DC - 12.4	0.30	0.01
12.4 - 18.0	0.40	0.02
18.0 - 40.0	0.60	0.05



WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com