


Fixed Coaxial Attenuator

WA29

WA 29/4: DC - 4.0 GHz
WA 29: DC - 8.5 GHz

75 WATTS

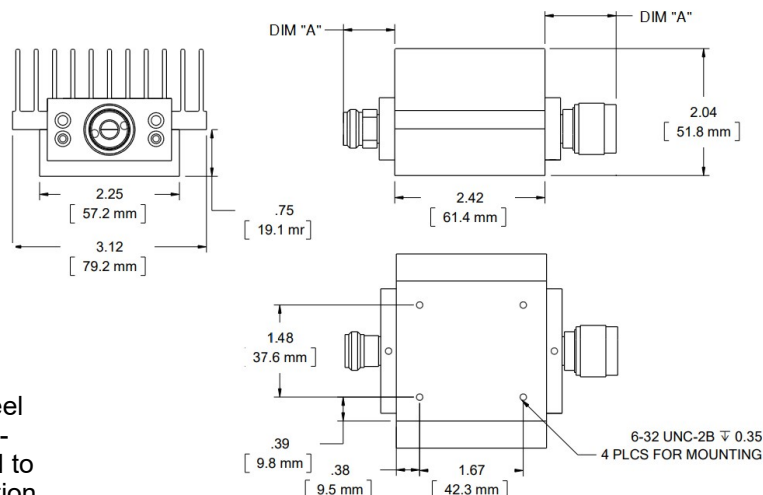

Features

Type N, SMA, TNC, or 7/16 DIN stainless steel connectors per MIL-STD-348A, interface non-destructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification. Passive cooling, flat base with mounting holes.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: WA29/4: DC - 4.0 GHz
 WA29: DC - 8.5 GHz

Nominal dB Values: 3 - 40 dB
 (50 dB available in a unidirectional variant)

Power Coefficient: < 0.005 dB/dB/W;
 Bidirectional in power.

Power Rating: 75 W average to 25°C ambient temperature, de-rated linearly to 5 W at +125°C, 5 KW peak (5µsec pulse width, 0.75% duty cycle).

Temperature Range: -55°C to +125°C.

Temperature Coefficient: < 0.0004 dB/dB/°C.

Construction: Black aluminum alloy body with passivated stainless steel connectors. Gold plated beryllium copper or stainless steel contacts. RoHS compliant.

Calibration: Insertion Loss and VSWR performed across frequency range. Calibration test data available at additional cost.

Low Intermodulation Option: Add -LIM after connector option to specify low intermodulation.

Standard Nominal Values and Deviations:

Attenuation (dB)	Accuracy \pm dB	
	WA29/4	WA29
1 - 2	0.5	0.75
3 - 20	0.4	0.75
21 - 30	0.6	1.0
31 - 40	0.8	1.2

Maximum VSWR:

Frequency (GHz)	VSWR	
	WA29/4	WA29
DC - 4.0	1.2	1.2
4.0 - 8.5	N/A	1.3

Dimensions:

Connector Type (- code)	Length
	Dimension 'A'
SMA F -01	9.8 (.39)
SMA M -02	10.9 (.43)
N-Type F -03	14.9 (.59)
N-Type M -04	17.7 (.70)
TNC F -05	14.4 (.57)
TNC M -06	17.7 (.70)
7/16 DIN F -07	30.5 (1.2)
7/16 DIN M -08	31.8 (1.25)

Weight: 19.2 (.55)
Height: 51.8 (2.04)
Width: 79.2 (3.12)

Note: Dimensions are given in mm (in), or g (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.